


## SEZIONE TRASVERSALE TIPO—Scala 1:50 (PER LE MISURE VEDERE TABELLA)



CIGLIO DX				TABELLA DIMENSIONI CIGLIO SX							
PALO DRENANTE n	Q1	Q2	L1	PALO DRENANTE n°	Q3	Q4	L2	Q5	Q6	L3	L4
1	2.780	-16.760	19.540		2.460	-10.010	12.470	-8.110	0.100	14.350	13.8
2	2.610	-17.090	19.700		2.430	-10.490	12.470	-8.590	0.050	14.350	13.8
3	2.530	-17.050	19.880	_	2.430	-10.490	13.260	-8.980	0.090	14.350	13.8
4	2.510	-17.780	20.290		2.300	-11.220	13.520	-9.320	0.130	14.350	13.8
5	2.530	-17.780	20.290		2.300	-11.510	13.640	-9.610	0.160	14.350	13.8
6	2.450	-18.130	20.490		2.130	-11.700	13.760	-9.800	0.100	14.350	13.8
7											
8	2.430	-18.300	20.730	•	2.070	-11.730	13.800	-9.830	0.210	14.350	13.8
	2.210	-18.470	20.680	_	2.120	-11.720	13.840	-9.820	0.220	14.350	13.8
9	2.070	-18.600	20.670		2.200	-11.710	13.910	-9.810	0.230	14.350	13.8
10	1.980	-18.710	20.690		2.140	-11.700	13.840	-9.800	0.340	14.350	13.8
11	2.020	-18.780	20.800		2.420	-11.680	14.100	-9.770	0.400	14.350	13.8
12	2.130	-18.820	20.950		2.860	-11.660	14.520	-9.770	0.400	14.350	13.8
13	2.200	-18.830	21.030		2.860	-11.650	14.510	-9.770	0.400	14.350	13.8
14	2.170	-18.820	20.990		2.860	-11.640	14.500	-9.770	0.400	14.350	13.8
15	2.350	-18.820	21.170		2.390	-11.640	14.030	-9.770	0.400	14.350	13.8
16	2.390	-18.810	21.200		2.310	-11.630	13.940	-9.730	0.630	13.540	13.1
17	2.410	-18.810	21.220		2.230	-11.620	13.850	-9.720	0.630	13.540	13.1
18	2.280	-18.800	21.080		2.250	-11.610	13.860	-9.710	0.630	13.540	13.1
19	2.240	-18.800	21.040		2.110	-11.600	13.710	-9.700	0.630	13.540	13.1
20	2.240	-18.800	21.040		2.070	-11.590	13.660	-9.690	0.630	13.540	13.1
21	2.290	-18.780	21.070		2.160	-11.580		-9.680	0.630	13.540	13.1
22	2.160	-18.770	20.930	22	2.240	-11.570	13.810	-9.670	0.630	13.540	13.1
23	2.160	-18.760	20.920								
24	2.170	-18.760	20.930								
25	2.170	-18.760	20.930								
26	2.170	-18.760	20.930								
27	2.170	-20.260	22.430								
28	2.170	-20.260	22.430								
29	2.000	-20.260	22.260								
30	2.000	-20.260	22.260								
31	2.000	-20.260	22.260								
32	2.000	-20.260	22.260								
33	2.140	-20.260	22.400								
34	2.140	-20.260	22.400								
35	2.210	-20.260	22.470								
36	2.240	-20.260									
37	2.270	-18.730									
38	2.250	-18.720	20.970								
39	2.210	-18.720	20.930								
40	2.160	-18.710	20.870								
41	2.160	-18.710									
42	2.110	-18.700									
43	2.120	-18.700	20.820								
44	2.130	-18.690									
45	2.160	-18.690									
46	2.200	-18.680									
47	2.220	-18.680	20.900								
48	2.250	-18.670									
40	2.230										
49	2.250	-18.670	20.920						Į.		

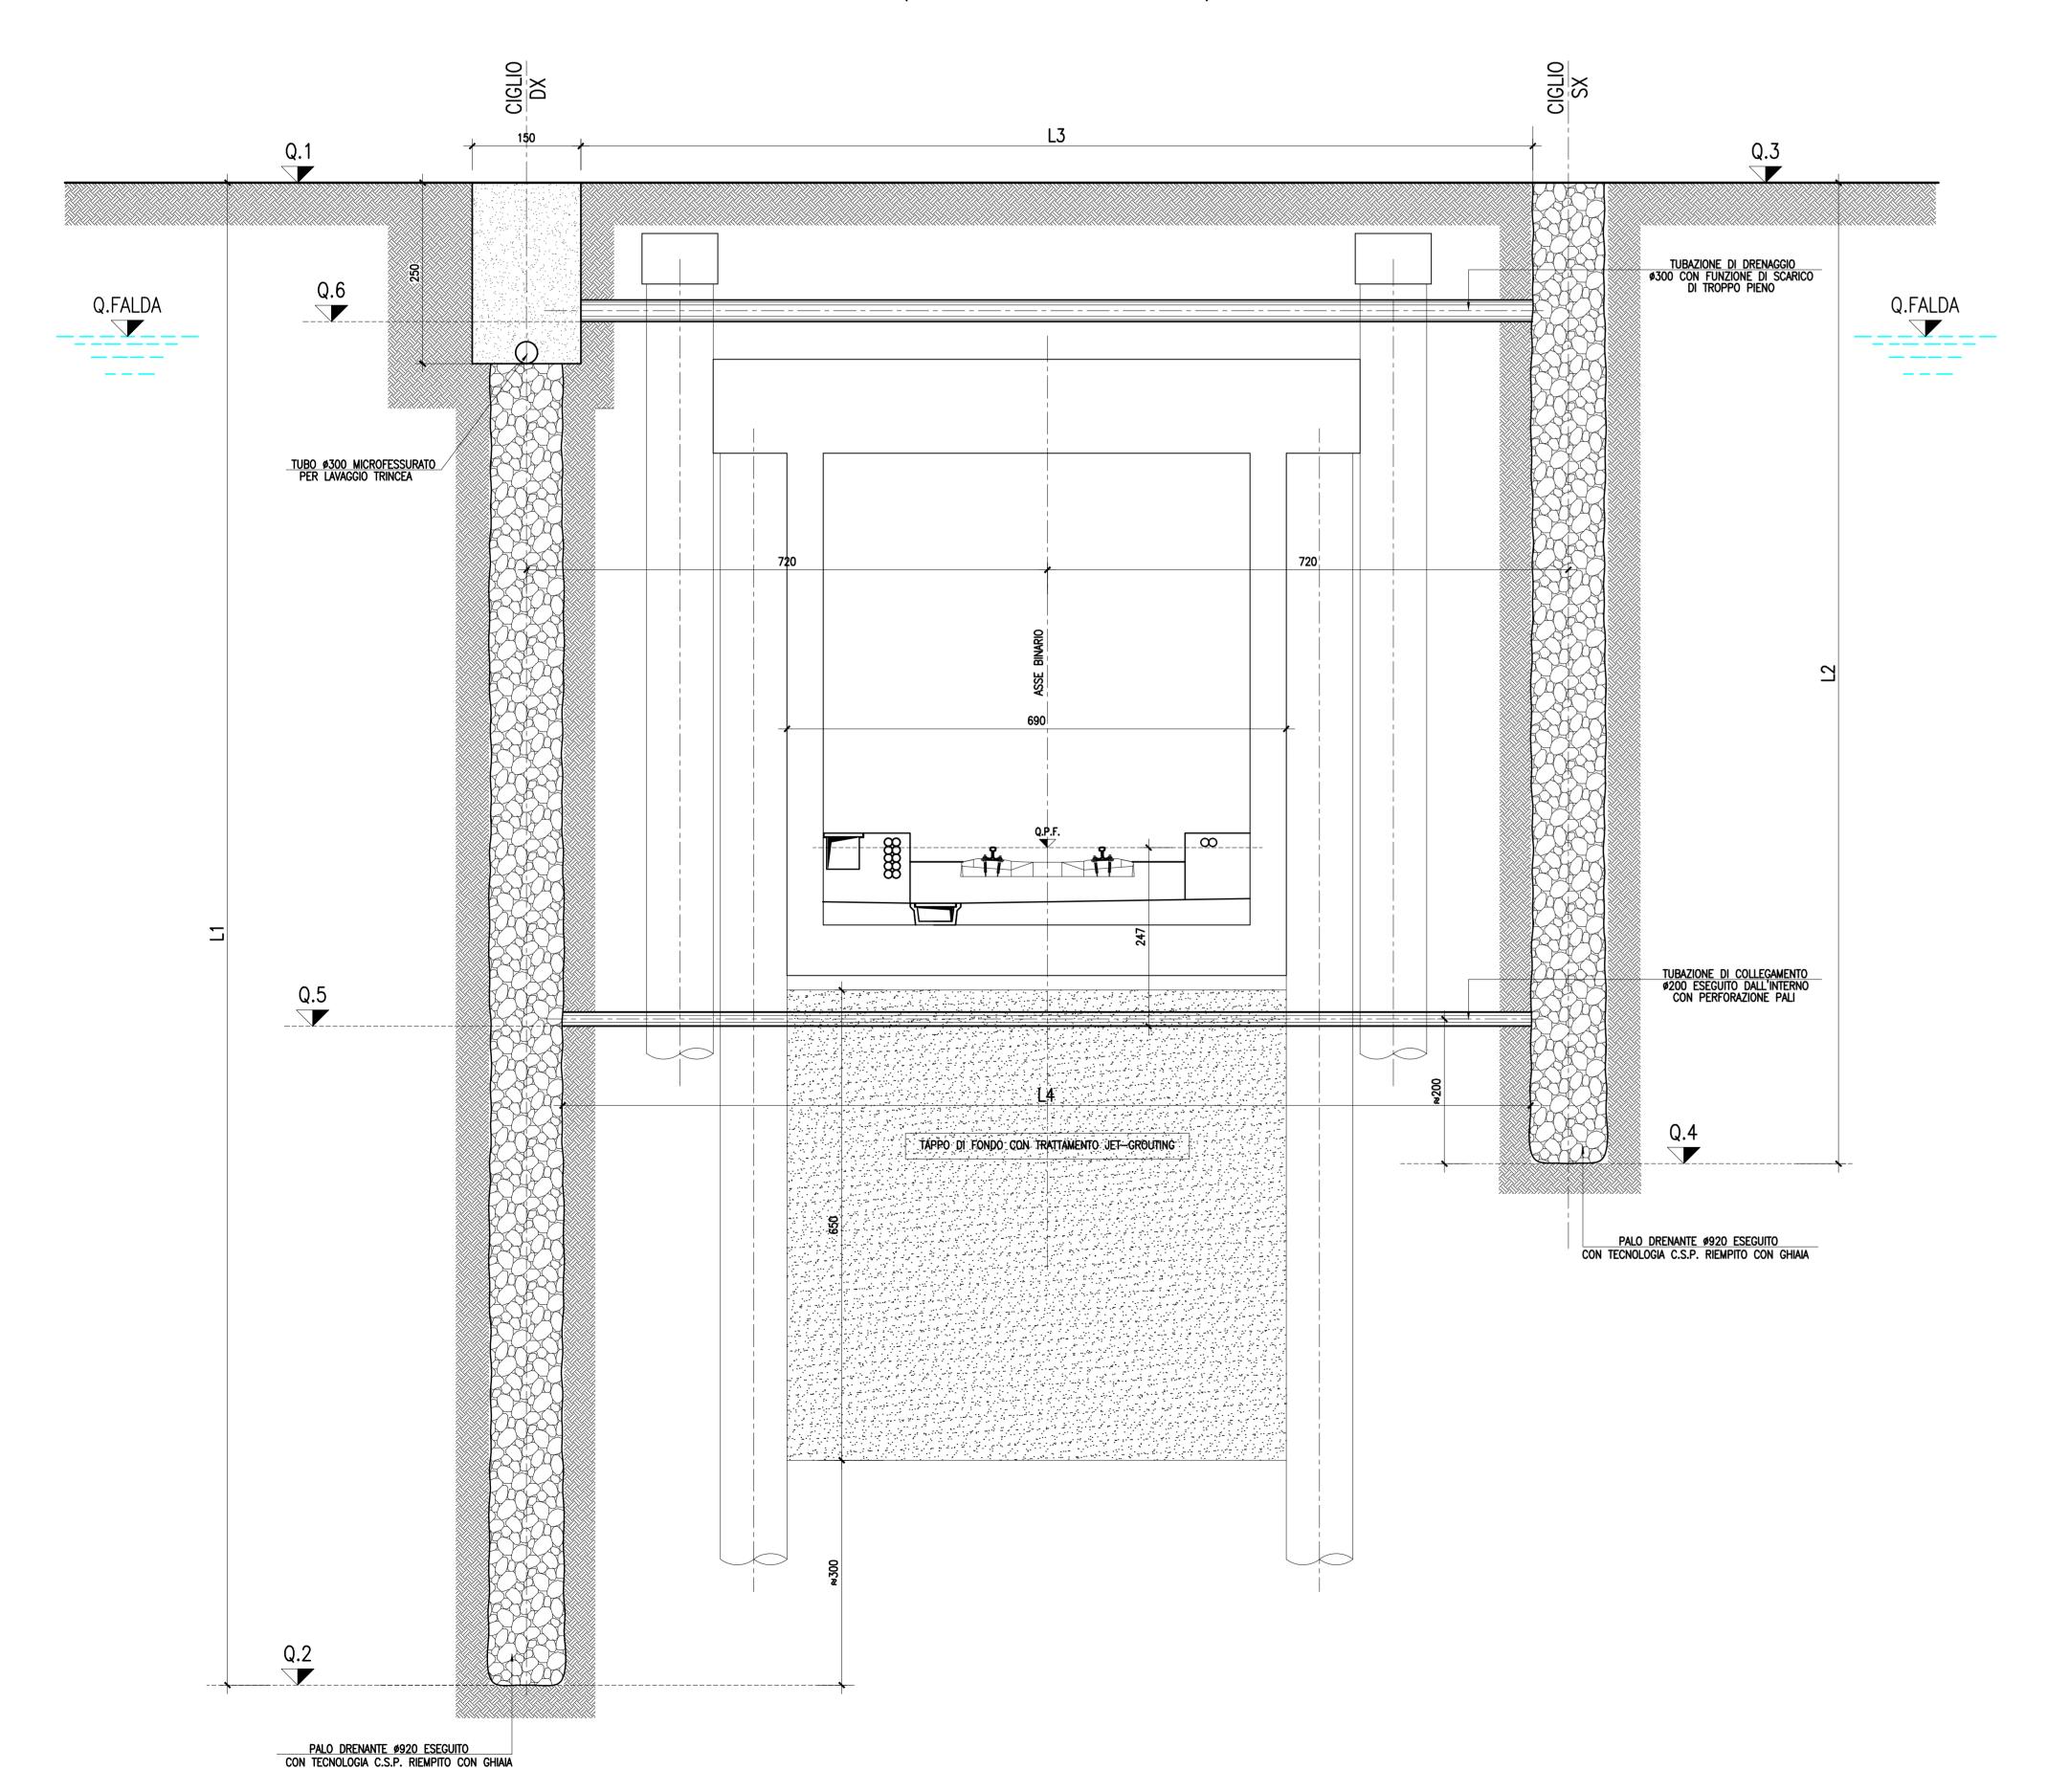